

QUICK START INSTALLATION GUIDE

1 Choose location and install AllSync IQ Master

- Place the AllSync IQ indoors in an area with a network drop, or run an Ethernet data cable to the unit from a network switch or hub.
- Locate near 120vac power
- Locate near signaling and/or clock wiring

2 Mount the AllSync IQ Master

- Wall Mount** - see mounting template on reverse side
 - Use included mounting template to mark hole locations
 - Drill pilot or anchor holes
 - Install keyhole screw (leave screw head 0.1" away from wall)
 - Hang AllSync IQ master
 - Install bottom screws through open wiring compartment
- Rack Mount** - install into 19" server rack (H002944 bracket kit required)
 - Place four (4) screws (not included) into server rack with H002944 kit
 - Follow instruction sheet 1719 (included) to mount to din rail bracket




3 Connect cables to the AllSync IQ Master

- Connect Ethernet patch cable to Ethernet RJ45 port located on left side of AllSync IQ master.

Note: Disconnect and lockout power prior to making power connections.

- Knock out desired power entry location.
- Connect power wires to screw terminals labeled H (Hot), N (Neutral) and Ⓧ (ground) through open knockout location. Use only approved cables, strain relieve and conduit.
- Turn on power at power source.
- Turn on power with power switch located on left side of AllSync IQ master.

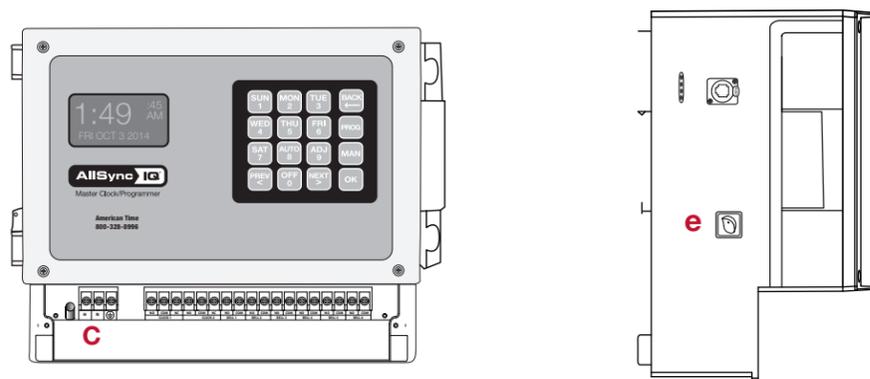

ALLSYNC IQ MASTER CLOCK

4 Use the Setup Wizard

- Press **SUN 1** to start the Setup Wizard (Page 5 in Installation Manual)
- Create a 4 digit **User Lock** or enter 0000 to disable this feature. Press **OK**.
Tip: Record this password. _ _ _ _
- Create a 4 digit **Service Lock** (for advanced features) or enter 0000 to disable this feature. Press **OK**. **Tip: Record this password.** _ _ _ _
- Select local time zone by using the **PREV <** **NEXT >** keys. Press **OK**.
- Press **AUTO 8** to select automatic DST (Daylight Saving Time) or **OFF 0** to disable DST if your location doesn't observe DST. Press **OK**.
- Press **SUN 1** for 12-hour mode - AM/PM (1:00PM). Press **MON 2** for 24-hour mode - Military (13:00).
- Press **SUN 1** to Enable DHCP or press **MON 2** to Disable DHCP. Press **OK**.
- Use the keypad to enter the Unit IP Address. Press **OK**.
- Use the keypad to enter the Subnet Mask. Press **OK**.
- Use the keypad to enter the Gateway IP. Press **OK**.
- Use the keypad to enter the Time Server Address. Press **OK**.
- Use the keypad to enter the Alternate Time Server Address. Press **OK**.
- Press **OK** to accept the default (80) Port Number.
- To confirm proper set, press **AUTO 8** to sync.
 - If successful, "Ethernet Sync Successful" will display.
 - If not successful, "Ethernet Sync Failed" will display. Refer to the troubleshooting guide in the Installation Manual.
- "Setup Wizard Successfully Completed" will display.

Skip if **SUN 1** is selected in step g

5 AllSync IQ Terminal Block

For wiring your AllSync IQ, reference your AllSync IQ Installation and Operation Manual.

Your AllSync IQ is now set up for proper operation. For information on other features, see the AllSync IQ Installation and Operation Manual that was included with your unit. If you have any questions or problems that cannot be resolved by following the steps in the Troubleshooting guide, please contact Technical Support at American Time at **800-328-8996**

american  time.

Integrated Solutions

phone: **800-328-8996**

fax: **800-789-1882**

online: **american-time.com**

mail: **140 3rd St. So.; PO Box 707, Dassel, MN 55325-0707**

