LATHEM
SINCE 1919

CloudTouch™
Web Enabled Time Clock Devices

12:49
PM

Clock In/Out

Totals

Transfer

Amounts

Monday
July 22

ENROLL   SETTINGS   SUPERVISOR

LATHEM

PayClock Online
Compatible

Power of the cloud with the touch of a finger...

Now you can easily record and manage employee time and attendance with the touch of a finger. Lathem's new CloudTouch time clocks have a modern 7" LCD touch screen interface that allows employees' to clock in & out, check their totals, change departments, add amounts, and more. Choose the CloudTouch time clock model that captures your employees time with a state-of-the-art biometric fingerprint sensor or proximity badge card reader. Supervisors can easily manage daily timekeeping requirements at the clock as well. Adding employees and editing punches are easy, and just a few of the many features available. CloudTouch time clocks have built in WiFi, so data is sent in real time to Lathem's PayClock Online time & attendance cloud-based software, where you can access and manage employee time card info at anytime, anywhere, via your secure web portal account.

Enable Employees

PIN Entry
You decide which employees and supervisors can use a unique PIN number in lieu of, or as a back up to, badges or biometric identification.

Employee Hours
The punch confirmation screen shows the employee the time they punched in/out, their total worked hours for that period and even messages from their supervisor.

Transfer Depts
Employees can easily choose from a customizable list of departments that automatically set the proper hourly pay rate.

Choose the right CloudTouch device for your needs
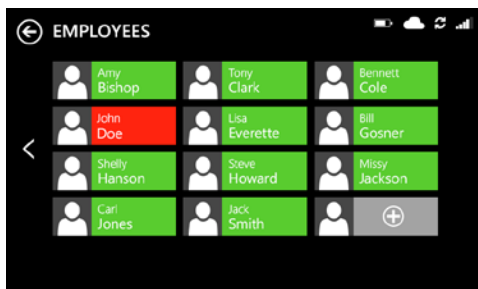
Model CT70
Proximity Badge Reader

Model CT72
Biometric Finger Reader

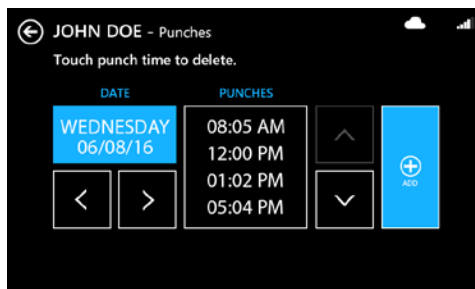## Built To Work In The Cloud With Offline Backup!

The CT Series shares data in the cloud instantly, for anytime, anywhere access using your existing WiFi or Ethernet internet connection. Rest assured that your data is secured and operation is seamless even when access to the internet becomes unavailable. The CT Series automatically senses internet availability and switches to offline mode during disruptions, still allowing full employee functionality, and storing those transactions in memory until the connection becomes available again.
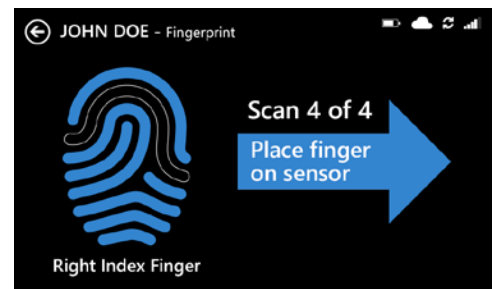
Empower Supervisors

View In/Out Status
Supervisors can quickly see who is in and who is out. Green indicates in and red indicates out.

Add/Edit Punches
The easy to use interface allows supervisors to add, delete or edit punches right at the terminal

Enroll Fingerprints on the CT72
The fingerprint enrollment wizard allows supervisors to add employees fingerprints in less than 30 seconds.

Powerful Features and Functions for Everyone

General

- Touch Screen Employee and Supervisor Kiosk Application
- Fingerprint Reader (CT72)
- Proximity RFID Card Reader
- Ethernet or WiFi Communication with Encryption
- Large Time Date Display with Screen Saver
- Door Access or Signaling via Internal Relay Control

Employees

- Biometric Identification (CT72)
- Clock In/Out with PIN
- Clock In/Out with Badge
- Transfer Departments
- View In/Out Status
- View Total Worked Hours
- View Benefit Time Balances
- Schedule Restriction
- View Text Messages
- Listen to Audio Messages

Supervisors

- View Employees & In/Out Status
- Edit Punches
- Add Employees
- Override Schedule Restriction
- Send Text Messages
- Send Audio Messages
- Enroll Employee Fingerprints

Administrators

- Network Settings (incl. DHCP)
- WiFi Setup
- Set Time & Date
- Enable Auto Daylight Saving Time Change
- Set AM/PM or 24HR Time Display Mode
- Set Relay Mode (Off, Door Access, Signaling)
- View Device Information
- View Error Log
- Update App Online

Specifications

Employee Capacity	1,000
Department Capacity	1,000
Input	7" Resistive Touch Screen LCD Display 125KHz-EM RFID Card Reader Optical Finger Sensor (CT72)
Communication	Ethernet TCP/IP WiFi 802.11 B/G/N Web Enabled Encryption
Memory Backup	Internal Lithium Battery 5 Year Cumulative Retention
Operational Backup	NiMH Rechargeable Battery (Option Sold Separately)

Dimensions	9"w x 5.875"h x 2.75"d
Weight	1.6 lbs
Construction	ABS Plastic Case
Mounting	Wall Mount with Metal Bracket
Power	Wall Adapter: 100-240VAC, 50/60Hz 0.6A, Device: 12VDC@1.25A
Operating Temperature	32°F-122°F (0°-50°C)
Operating Humidity	20-90% (non-condensing)
Relay	Internal Dry Contact 2A @ 24VDC or 120VAC Open, Common, Closed

Accessories

RFID Prox Badges

RFID Prox Key Fobs

Operational Backup Battery

LATHEM

Lathem • Atlanta, Georgia USA • www.lathem.com